

Standard fixings



Plug FX




Advantages


- 4-side expansion for high pull out loads
- Compatible with different types of screws such as wood screws, chipboard screws, self-tapping screws, etc.
- Efficient anti-rotation lugs prevents rotation in the drill hole
- Plug collar prevents slipping into the drill hole
- High quality and ageing resistant nylon
- Temperature resistant from -40°C to +80°C

Suitable building materials

- ✓ Concrete
- ✓ Natural stone
- ✓ Solid brick
- ✓ Solid sand-lime brick
- ✓ Lightweight solid concrete blocks
- ✓ Aerated concrete
- ✓ Gypsum blocks
- ✓ Hollow brick
- ✓ Hollow sand-lime brick
- ✓ Lightweight hollow concrete blocks

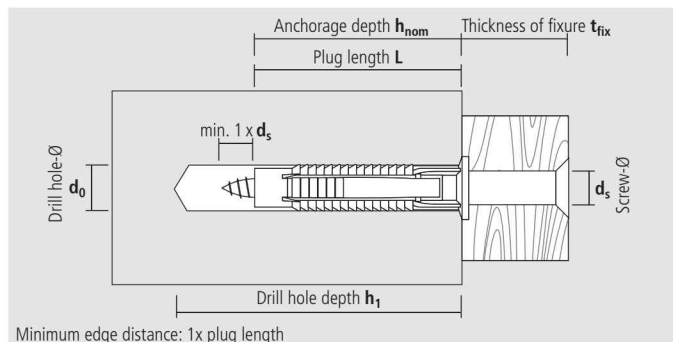

Mounting

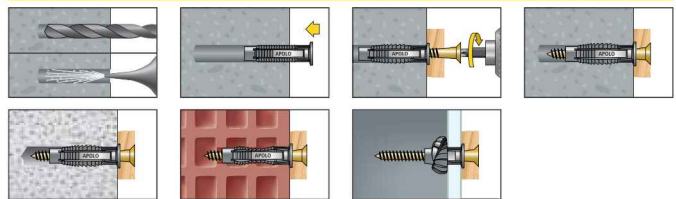

Watch video at www.celo-apolo.de/en



FX without screw

Type	Art-No		d ₀ [mm]	h ₁ ≥ [mm]	h _{nom} ≥ [mm]	L [mm]	d _s [mm]	Price €/ 100 pcs	Packing	
	new	old							[pcs]	[pcs]
FX 5	95FX	500124	5	35	25	25	2,5 - 4		100	6000
FX 6	96FX	500126	6	40	30	30	3,5 - 5		100	6000
FX 8	98FX	500128	8	55	40	40	4,5 - 6		100	2700
FX 10	910FX	500130	10	70	50	50	6 - 8		50	1350
FX 12	912FX	500138	12	80	60	60	8 - 10		25	675



FX incl. PZ chipboard screw (FX6 and 8) and hex-head wood screw (FX 10) respectively

Type	Art-No		d ₀ [mm]	h ₁ ≥ [mm]	h _{nom} ≥ [mm]	L [mm]	d _s x L _s ¹ [mm]	Price €/ 100 pcs	Packing	
	new	old							[pcs]	[pcs]
FX 6 SPS	96FXSZ	—	6	40	30	30	4,5 x 45		50	3000
FX 8 SPS	98FXSZ	—	8	55	40	40	5,0 x 60		50	1350
FX 10 SKS	910FXK	—	10	70	50	50	7,0 x 65		25	675

¹ Screw length