Type:	MMS-plus F countersunk head
Material:	carbon steel
Surface:	bright zinc plated, A2K
Recess:	T-Drive

Color code HECO-Label

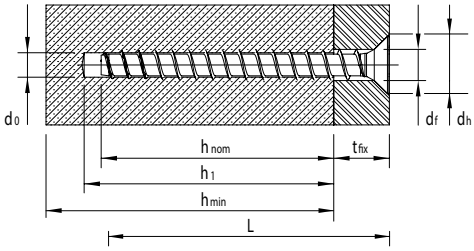

Size D x L [mm]		Article No.	Drill diameter d_0 [mm]	Clamping strength t_{fix} [mm]	Washer diameter [mm]	Recess	Appro-vals	Packing unit [pcs.]	Pieces per outer carton [pcs.]	Pieces per pallet [pcs.]
VARIANTA - BOXES FOR PROFESSIONALS										
5,0	30	54264*	4,0	1	8,7	T-25		200	2.000	96.000
	40	54265	4,0	5	8,7	T-25		200	2.000	96.000
	50	54266	4,0	15	8,7	T-25		200	2.000	96.000
	60	54267	4,0	25	8,7	T-25		200	2.000	96.000
6,0	40	49860	5,0	5	11,5	T-30	•	100	1.000	48.000
	50	48495	5,0	5/15	11,5	T-30	•	100	1.000	48.000
	60	48497	5,0	15/25	11,5	T-30	•	100	1.000	48.000
	70	48499	5,0	25/35	11,5	T-30	•	100	1.000	48.000
	80	48501	5,0	35/45	11,5	T-30	•	50	500	24.000
	100	48503	5,0	55/65	11,5	T-30	•	50	500	24.000
	120	48505	5,0	75/85	11,5	T-30	•	50	500	24.000
	140	48507	5,0	95/105	11,5	T-30	•	50	500	24.000
7,5	45	49862	6,0	10	15,5	T-40	•	100	1.000	48.000
	50	48509	6,0	15	15,5	T-40	•	100	1.000	48.000
	60	48511	6,0	5/25	15,5	T-40	•	50	500	24.000
	70	48513	6,0	15/35	15,5	T-40	•	50	500	24.000
	80	48515	6,0	25/45	15,5	T-40	•	50	500	24.000
	100	48517	6,0	45/65	15,5	T-40	•	50	500	24.000
	120	48519	6,0	65/85	15,5	T-40	•	50	400	19.200
	140	48521	6,0	85/105	15,5	T-40	•	50	400	19.200
	160	48523	6,0	105/125	15,5	T-40	•	50	400	19.200
10,0	60	48525	8,0	10	19,5	T-45	•	25	250	12.000
	70	48527	8,0	5/20	19,5	T-45	•/O	25	250	12.000
	80	48529	8,0	15/30	19,5	T-45	•/O	25	250	12.000
12,0	90	48531	10,0	15	24,0	T-50	•/O	25	100	8.400
	100	48533	10,0	10/25	24,0	T-50	•/O	25	100	8.400
	120	48535	10,0	30/45	24,0	T-50	•/O	25	100	8.400

• = according to ETA 15/0784

O = Z-21.8-2061 - multiple use

* Not qualified for fastenings in case of fire